




**aetrio**™

It's all about lighting.

**MAGNUM**

SMART MAGNETIC TRACK

# GRILLE LIGHT FOR ULTRA THIN TRACK

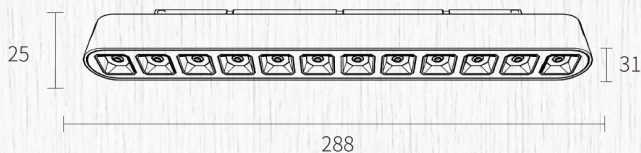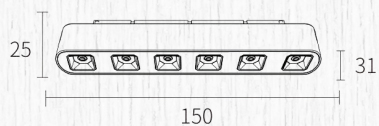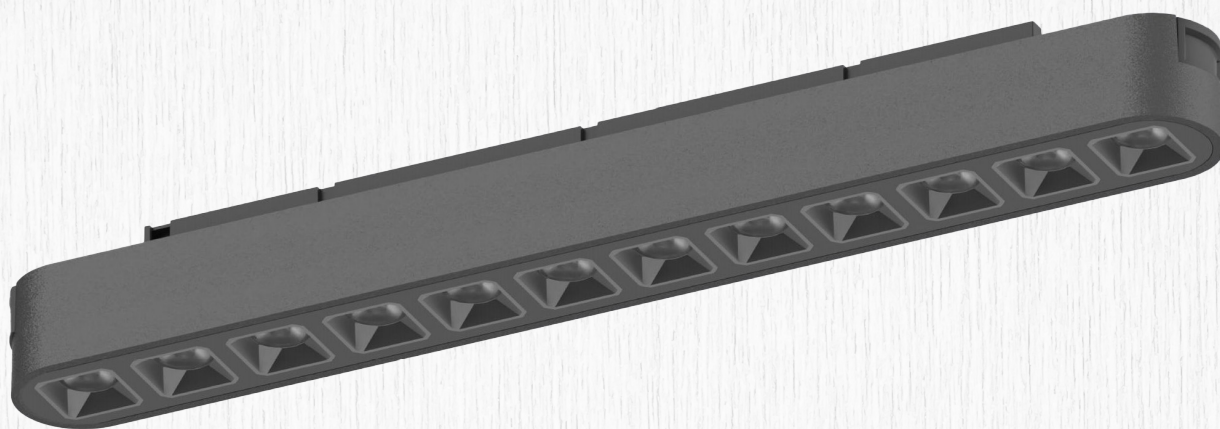

ITEM NO.	WATT	CRI	VOLTAGE	LUMEN	DIMENSION	LED	SYSTEM OPTIONS
ATF-30-LB12	20W	≥ 90	48V	76.67LM/W	L288*W31*H25MM	OSRAM	0-10V BLUETOOTH



2700 TO 6500 CCT






DIMMABLE & TUNEABLE



SMART LIGHTING  
COMPATIBLE

# LINEAR LIGHT WITH HONEYCOMB FOR ULTRA THIN TRACK

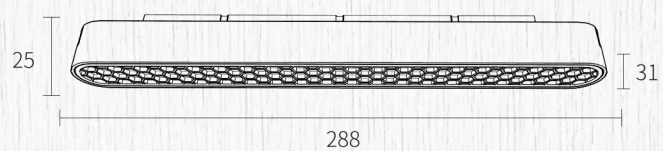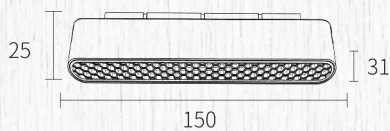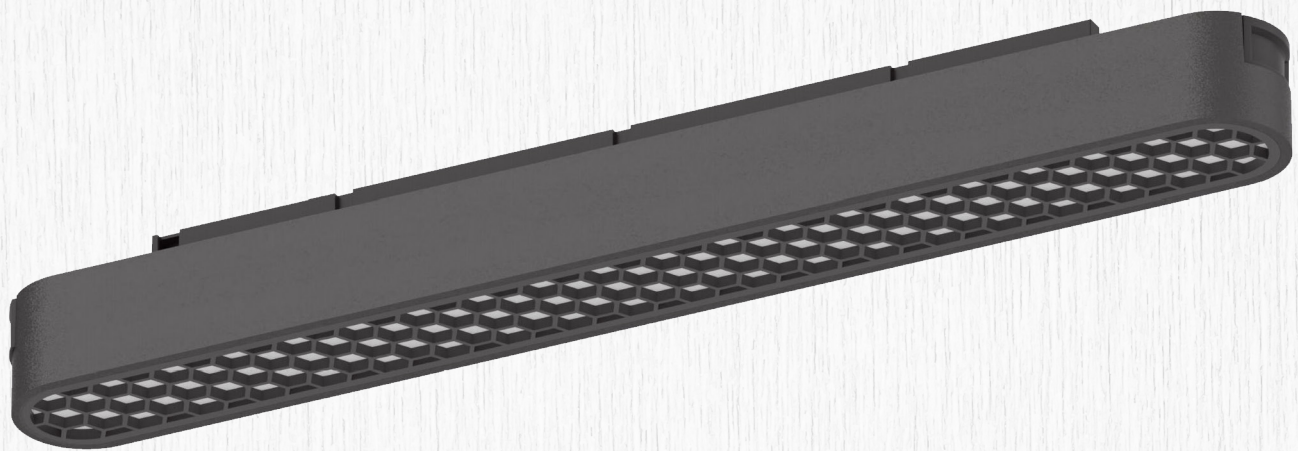

ITEM NO.	WATT	CRI	VOLTAGE	LUMEN	DIMENSION	LED	SYSTEM OPTIONS
ATF-30-HB300	12W	≥ 90	48V	35.76LM/W	L288*W31*H25MM	OSRAM	0-10V BLUETOOTH



2700 TO 6500 CCT





DIMMABLE & TUNEABLE



SMART LIGHTING  
COMPATIBLE

# FOLDING GRILLE LIGHT FOR ULTRA THIN TRACK

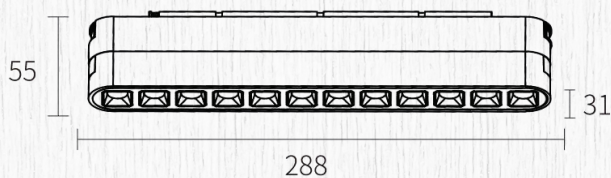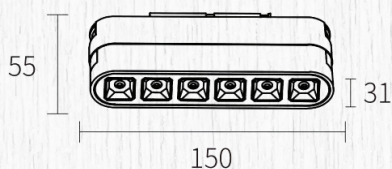

ITEM NO.	WATT	CRI	VOLTAGE	LUMEN	DIMENSION	LED	SYSTEM OPTIONS
ATF-30-Z-LB6	12W	≥ 90	48V	35.5LM/W	L150*W31"H55MM	OSRAM	0-10V BLUETOOTH



2700 TO 6500 CCT






DIMMABLE & TUNEABLE



SMART LIGHTING  
COMPATIBLE

# FOLDING LINEAR LIGHT WITH HONEYCOMB FOR ULTRA THIN TRACK

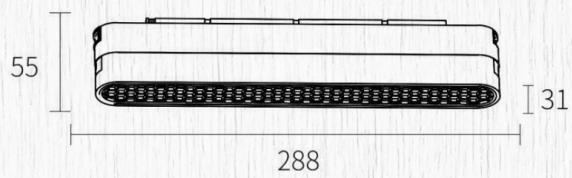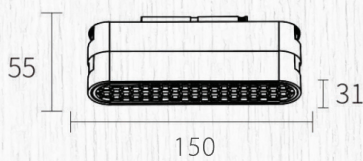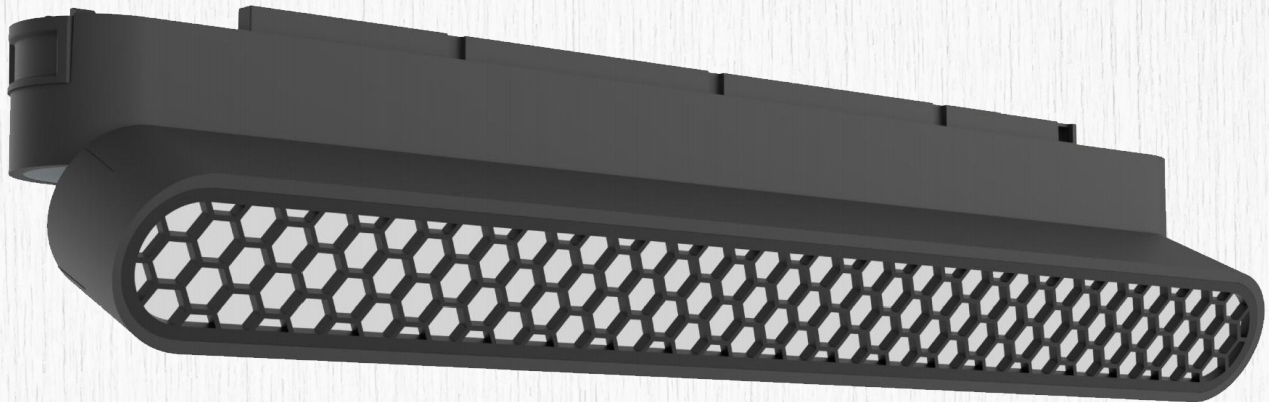

ITEM NO.	WATT	CRI	VOLTAGE	LUMEN	DIMENSION	LED	SYSTEM OPTIONS
ATF-30-Z-HB300	12W	≥ 90	48V	35.76LM/W	L288*W31"H55MM	OSRAM	0-10V BLUETOOTH



2700 TO 6500 CCT






DIMMABLE & TUNEABLE



SMART LIGHTING  
COMPATIBLE

# FOLDING DIFFUSER LINEAR LIGHT FOR ULTRA THIN TRACK

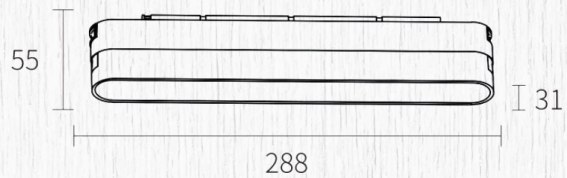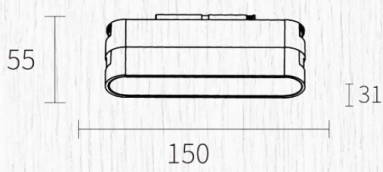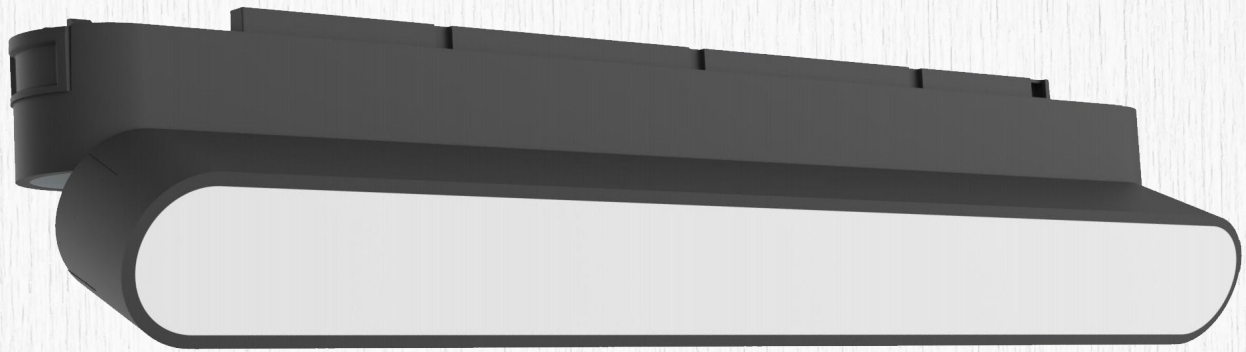

ITEM NO.	WATT	CRI	VOLTAGE	LUMEN	DIMENSION	LED	SYSTEM OPTIONS
ATF-30-Z-PC150	8W	≥ 90	48V	79.46LM/W	L288*W31"H55MM	OSRAM	0-10V BLUETOOTH



2700 TO 6500 CCT







DIMMABLE & TUNEABLE



SMART LIGHTING  
COMPATIBLE

# TRACK LIGHT

## FOR ULTRA THIN TRACK

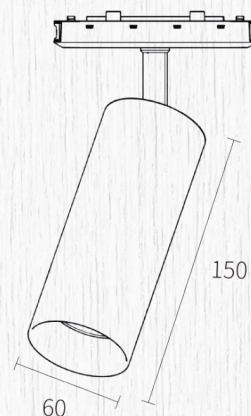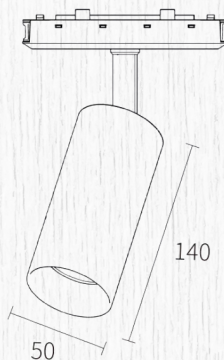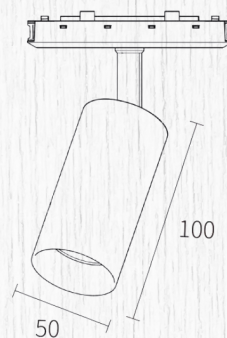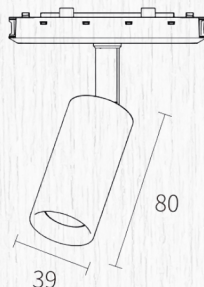

ITEM NO.	WATT	CRI	VOLTAGE	LUMEN	DIMENSION	LED	SYSTEM OPTIONS
ATF30-X7W	7W	≥ 92	48V	95.43LM/W	D50*100	OSRAM	0-10V
ATF-30-X-12W	12W	≥ 92	48V	92.24LM/W	D50*140	OSRAM	BLUETOOTH



2700 TO 6500 CCT





DIMMABLE & TUNEABLE




SMART LIGHTING  
COMPATIBLE

# MAGNETIC TRACK


## ULTRA THIN




Pass-through module



Corner module

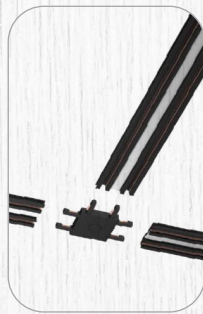

Three direction module

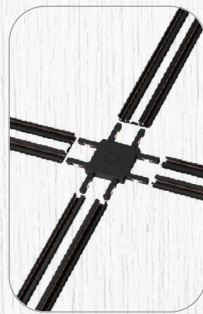

Four direction module




IN corner module




End cap

# MAGNETIC RAIL MOUNTING MODULE ULTRA THIN


## Two copper wire




Pass-through module



Corner module



Three direction module

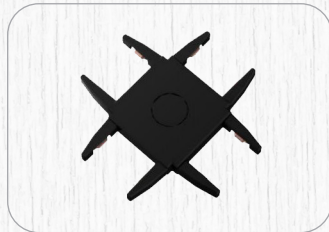

Four direction module




IN corner module


## Four copper wire



Pass-through module




Corner module

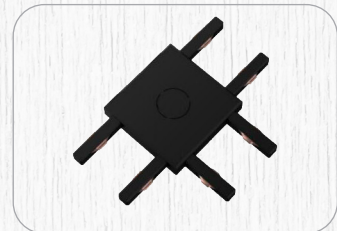

Three direction module



Four direction module

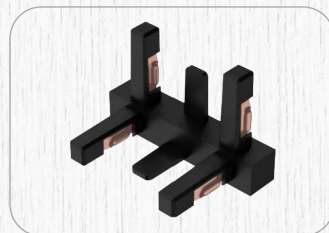

IN corner module

## Input module:





Back



Front

# MAGNETIC POWER SUPPLY

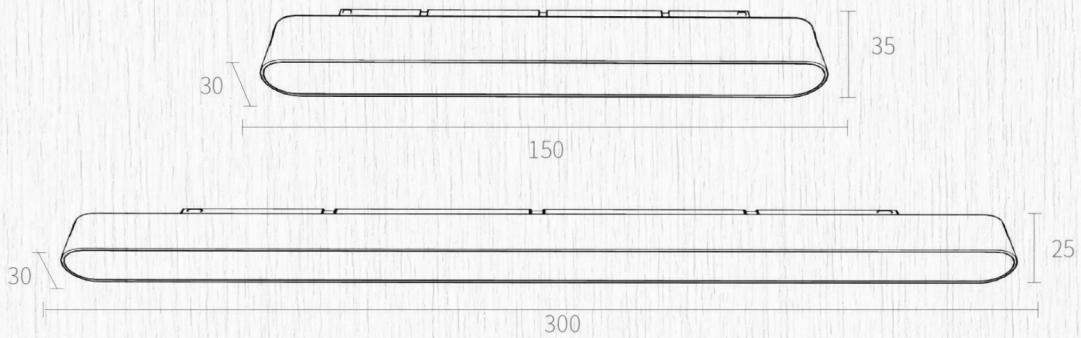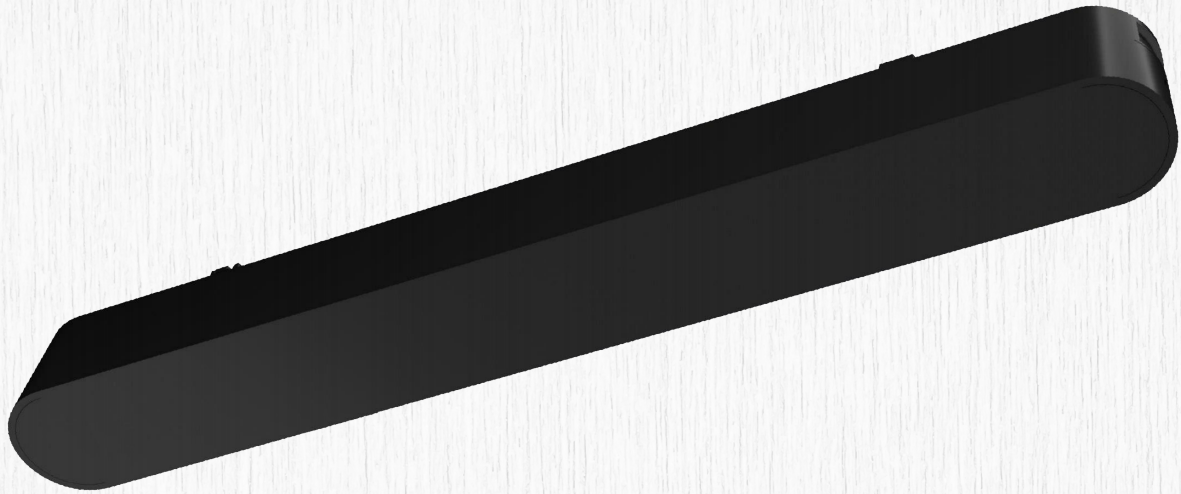

ITEM NO.	WATT	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMENSION
UTF-30-100W	100W	220-240V	48V	L150*W30*H3SMM
UTF-30-200W	200W	220-240V	48V	L300*W30*H3SMM



2700 TO 6500 CCT



DIMMABLE & TUNEABLE



SMART LIGHTING  
COMPATIBLE

# USE THE SCENE



# USE THE SCENE



**aetrio**<sup>TM</sup>  
Its all about lighting.

 22 Rabindra Sarani, Tireta Market,  
Opp. Poddar Court , Kolkata 700073

 +91 79805 33464

 [sales@aetrioled.com](mailto:sales@aetrioled.com)